

## Interface module - VIP-2/SC/D37SUB/M/SO - 2900786

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and male D-SUB miniature pin strip, for mounting on NS 35 rails, 37-pos.

### Why buy this product

- These VARIOFACE modules are used in combination with the relevant front adapters



### Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4046356545082

### Technical data

#### Dimensions

Width	101 mm
Height	65.5 mm
Depth	45.1 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Max. perm. operating voltage	125 V AC/DC
Max. perm. current (per branch)	2 A
Number of positions	37
Status display	No
Mounting position	any

#### Connection data for connection 1

Connection name	Field level
-----------------	-------------

# Interface module - VIP-2/SC/D37SUB/M/SO - 2900786

## Technical data

### Connection data for connection 1

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Connection data for connection 2

Connection name	Controller level
Connection method	D-SUB pin strip
Number of connections	1
Number of positions	37

### Supported controller


Controller	HONEYWELL Experion PKS C300/C-Series
- suitable I/O card	TDIL01 (non-redundant)
	TDOB01 (non-redundant)
	TAOX01 (non-redundant)
	TAIX01 (non-redundant)
	TDIL11 (redundant)
	TDOB11 (redundant)
	TAOX11 (redundant)
	TAIX11 (redundant)

### Standards and Regulations

Standards/regulations	DIN EN 50178
-----------------------	--------------

## Drawings

Circuit diagram

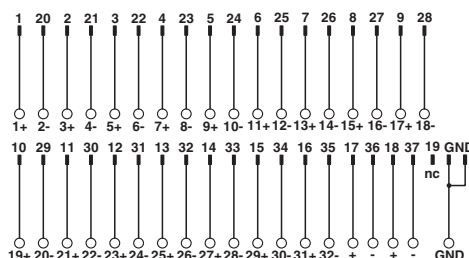

Connection scheme VIP-2/SC/D37SUB/M/SO

## Approvals

Approvals

## Interface module - VIP-2/SC/D37SUB/M/SO - 2900786

### Approvals

---

Approvals


EAC / EAC

---

Ex Approvals

---

### Approval details

EAC		7500651.22.01.00246
-----	---	---------------------

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

---

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>